



LAYOUT

NOTE GENERALI:  
- tutte le misure sono da verificare sul luogo;  
- la posizione della baionetta è da verificarsi in sede di costruttivo;  
- le altezze si considerano dal pavimento finito al controsoffitto;  
- le dotazioni impiantistiche sono riportate nelle specifiche tavole "20011 PE F&B 01-02";  
- la legenda completa è riportata sulla tavola "20011 PE F&B 05";  
- i dettagli esecutivi di massima sono riportati nella tavola dedicata;

ITEM	QTY	SOURCE	DESCRIPTION	L MM	D	H
HOT LINE_2						
141	1	ELECTROLUX PROFESSIONAL	STAINLESS STEEL 304 WALL HOOD + FILTERS + LIGHTS	3780	1500	500
141.1	1	ELECTROLUX PROFESSIONAL	Hood Control Panel			
141.2	1	Ansul	Fire Suppression System			
141.3	1	FABRICATOR	S/S Wall Panels (LOT)			
142	2	RATIONAL	RATIONAL ICOMBI PRO OVEN 6 GN 1/1	850	842	754
142.1	1	Everpure	Water Filtration System			
145	4	FABRICATOR	CABINET-TABLE WITH 2 HINGED DOORS	900	930	1000
145.1	1	ELECTROLUX PROFESSIONAL	Blast_Chiller-Freezer_6GN1_1_-30_30_kg	897	937	1060
146	1	ELECTROLUX PROFESSIONAL	ELECTRIC PASTA COOKER. 1 BOWL 40 LT	400	930	850
147	1	GEM	WORKTOP WITH 1200MM UPSTAND	1200	930	140
147.1			REFRIGERATED BASE 2 DRAWERS, -2+10°C, 1200 MM -R290	1200	830	600
148	1	Garland Commercial Ranges	INDUCTION HOB, DOUBLE ZONE, COUNTERTOP, SINGLE PHASE	400	600	152
149	1	Garland Commercial Ranges	INDUCTION HOB, DOUBLE ZONE, COUNTERTOP, SINGLE PHASE	400	600	152
150	1	Garland Commercial Ranges	INDUCTION HOB, DOUBLE ZONE, COUNTERTOP, SINGLE PHASE	400	600	152
151	1	Electrolux Professional	CUOCIPASTA ELETT. 1 VASCA 40 LT	400	930	850

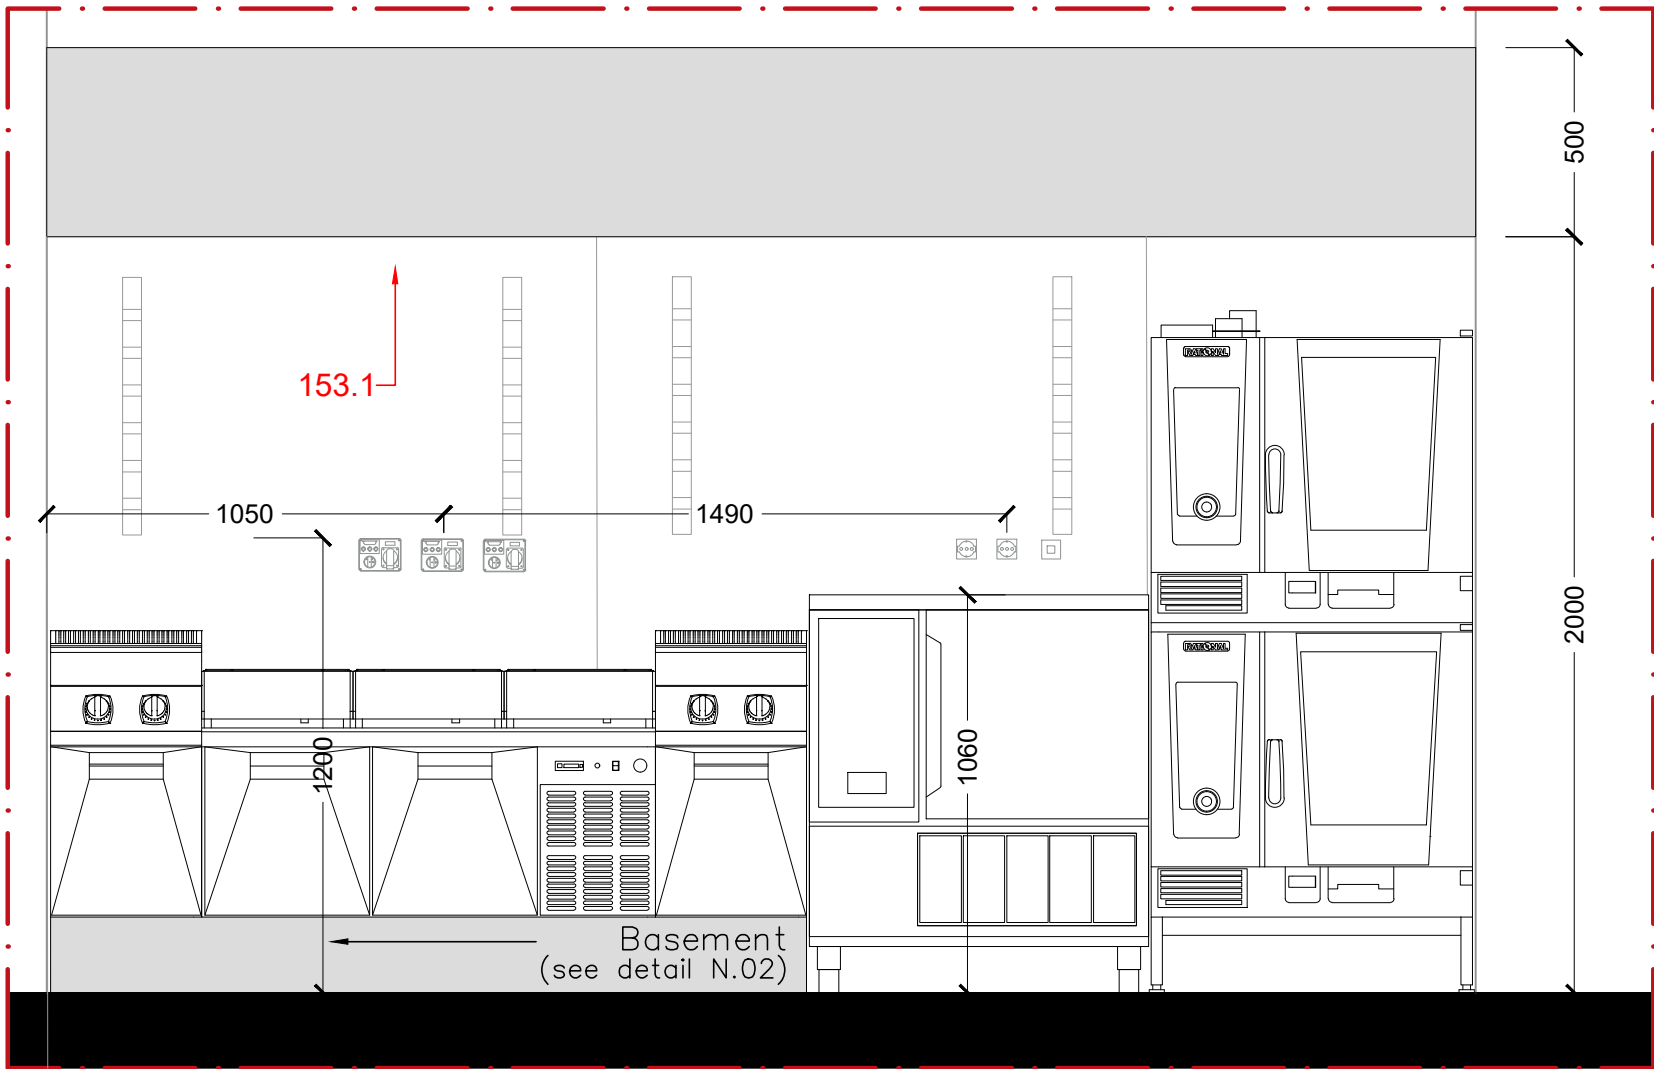

A- FRONTAL VIEW

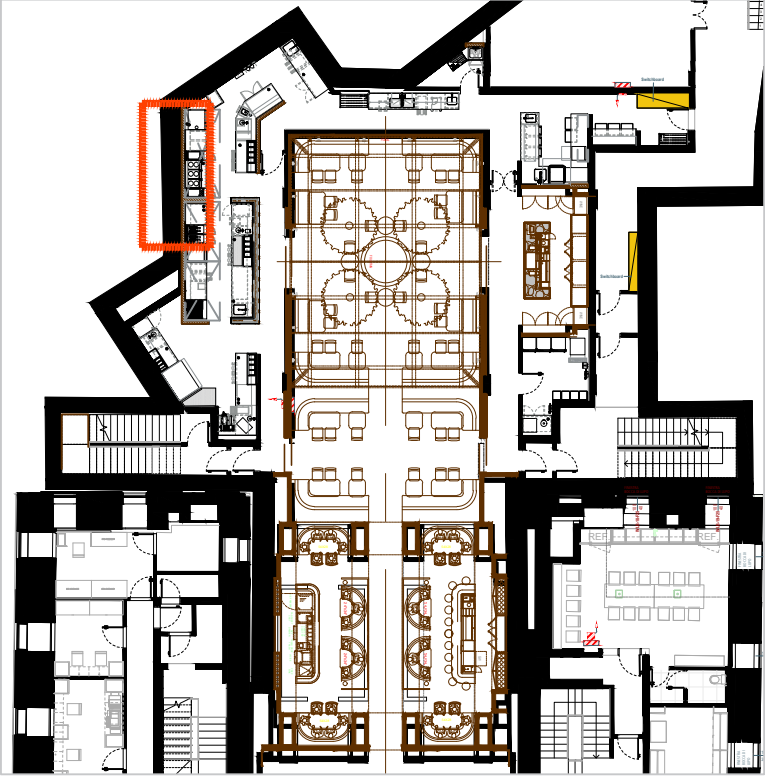

COMUNE DI MILANO  
CONSTRUCTION DOCUMENTATION

**Property**  
AST VENEZIA S.R.L.

Via Borgonuovo, 9  
20121 Milano

**Tenant**  
RH MILAN S.R.L.

Vicolo San Giovanni sul muro, 9  
20121 Milano



CONSULTANT'S TEAM



**BMS Progetti s.r.l.**

piazza santissima trinità 6  
20154 milano

bmsprogetti.it

**Designer**  
ing. Aldo Bottini

**Consultants**  
SMP studio  
PAN studio  
Jensen Hughes

Ristrutturazione Edilizia - Corso Venezia 56

TITLE				SCALE	
Dettaglio hot line_2 piano B01 _ ABBATTITORE				1:20	
DOCUMENT				ISSUE	
20011 P E F&B 115				07/03/2025	
REV	DATE	DESCRIPTION	EDITED	VERIFY	APPROVED
00	07/03/25	Tender Package	MR	CC	AM